ALLUME
LINEAR DIRECT VENT GAS FIREPLACES

astria FIREPLACES®

Allume 60 with Black Reflective Glass Liner and Reflective Black Crushed Glass

STANDARD FEATURES

- Available in a 60" linear configured model
- See through conversion kit available to allow viewing from two living spaces
- HeatFlo™ kit option directs heat above heat sensitive wall hangings
- Electronic ignition with battery backup provides continued operation in the event of a power outage
- Clean-face design with integrated tile stops for easy finishing
- Ceramic glass for optimum heat transfer and a protective screen*
- Black painted interior standard with multiple glass liner options available
- Reflective black crushed glass media included with several optional colors available to customize the look
- On/off thermostat remote included
- Optional variable speed blower available to fine tune your heating needs
- Limited Lifetime Warranty

**All applicable models comply with ANSI Z21.50/88 barrier requirements.*

LINERS

Black Painted (Standard)

Black Reflective

White Reflective

MEDIA



Refl. Black (Standard) **Crushed Glass**

Platinum **Crushed Glass**

Refl. Blue **Crushed Glass**

Goldfinger **Crushed Glass**



Copper **Crushed Glass**



Onyx **Ice Rock**



Diamond **Ice Rock**

Sapphire Blue **Ice Rock**

River Rock Assorted Set

High-Definition Driftwood Log Set

ON/OFF THERMOSTAT REMOTE (Included)

APPLIANCE SPECIFICATIONS

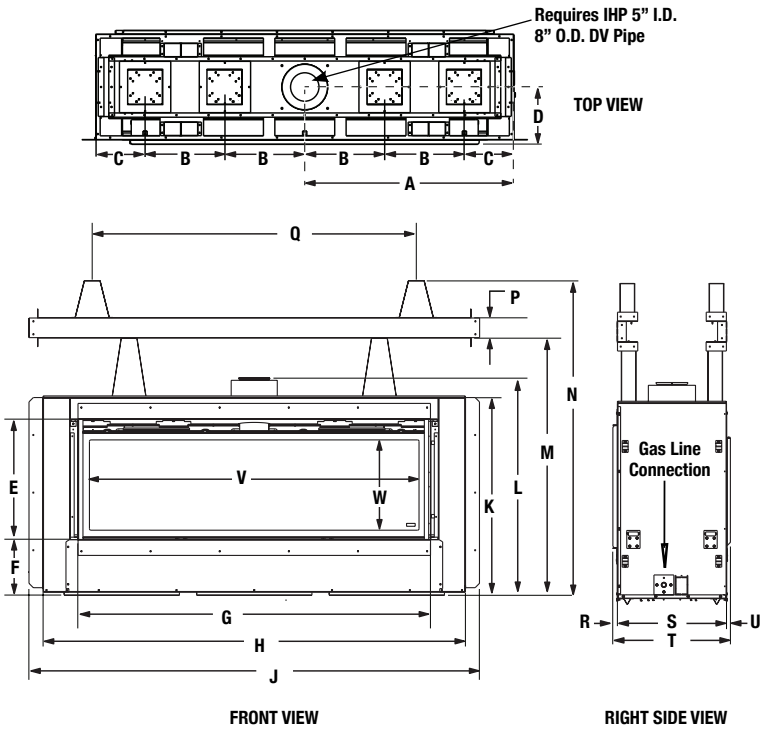

ALLUME

A	B	C	D	E	F	G	H	J	K	L
36-5/8"	14"	8-5/8"	9-3/8"	20-7/8"	9-3/4"	61-1/4"	73-1/4"	78-1/4"	34-3/8"	37-3/4"
M	**N**	**P**	**Q**	**R**	**S**	**T**	**U**	**V**	**W**	
44-5/8"	54-5/8"	3-1/2"	43-1/2"	3/4"	18-1/2"	19-1/4"	5/8"	57-1/8"	15-1/2"	

Refer to Installation Manual for all required clearances to combustibles.

FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE	P4
ALLUME 60	*NG*	47,000	52.2	42.2
ALLUME 60	*LP*	41,000	52.3	41.9

IMPORTANT NOTES:
As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.
Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.
Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

FLAT WALL FRAMING SPECIFICATIONS

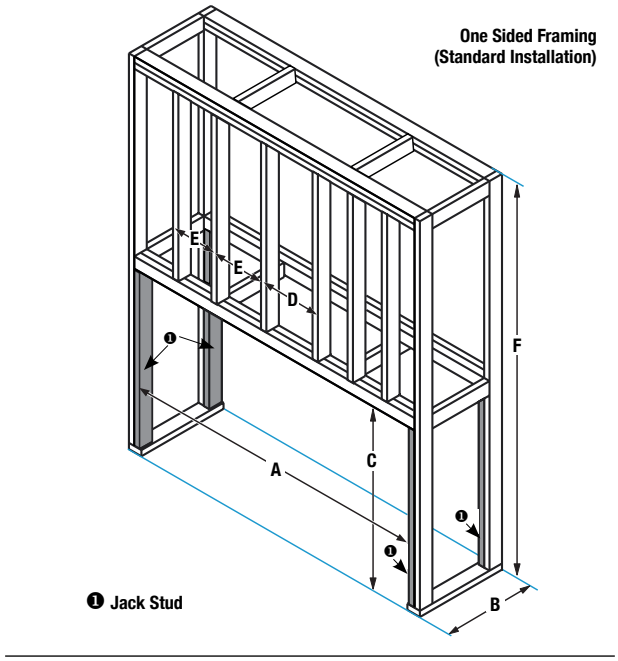

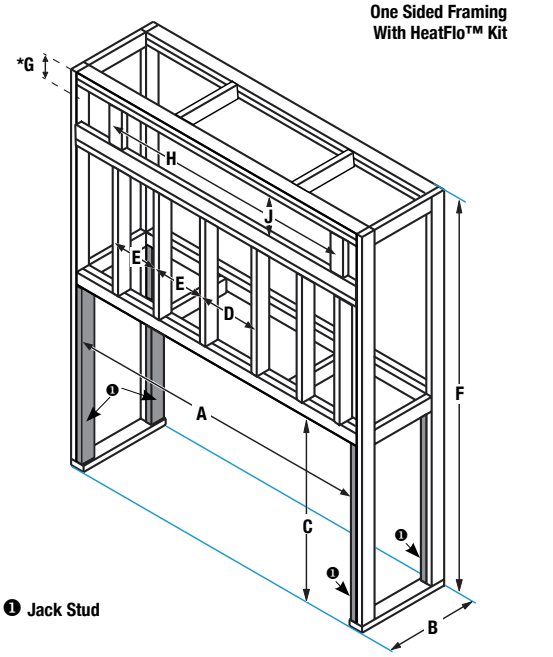

ALLUME FRAMING DIMENSIONS

60" Models	A	B	C	D	E	F	*G	H	J
One Sided Framing	75-1/2"	19-1/2"	54-3/4"	16"	12"	96"	6"	64-1/4"	7-1/2"
One Sided Framing HeatFlo™ Kit	75-1/2"	19-1/2"	54-3/4"	16"	12"	96"	6"	64-1/4"	7-1/2"

F. MINIMUM HEIGHT FROM APPLIANCE BASE TO CEILING
*G. MINIMUM DISTANCE FROM VENT OPENING TO CEILING

Refer to Spec Sheet for complete see-through applications and instructions.

astria FIREPLACES®

© 2018 Innovative Hearth Products

Visit us online
Astria.us.com

PFS C US Report #F11-026

NFI

Canada
ENERGUIDE
Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in the brochure
Based on CSA P.4.1-2015