# GEMINI DLX
DIRECT VENT GAS FIREPLACES

astria FIREPLACES®

## STANDARD FEATURES

- Available in 35", 40" and 45" models
- Combo top/rear flue configuration
- Electronic ignition with seamless battery backup provides continued operation in the event of a power outage (IPI/CPI switch standard).
- Outstanding heating efficiency for increased comfort and lower operating costs
- Ceramic glass for optimum heat transfer and a protective screen
- Beautifully crafted high-definition ceramic fiber log set with heavy-duty grate
- Face selections include a Classic inside fit façade or one of several Designer overlap fit facades (required)
- Interior selections consist of black reflective porcelain or a variety of ceramic fiber liners (required)
- Mood-enhancing interior illumination with six distinctive settings
- Factory installed blower with six speed settings to fine tune your heating needs
- Full-function remote control included (IPI/CPI, thermostat, flame height, blower, lighting)
- Durable textured powder coat finish
- Limited lifetime warranty

## FACADES
(Choose One)

*CLASSIC — Black*

*ARTISAN — Charcoal/Aged Iron*

*REFLECTION — Black*

*REFLECTION — Warm Chestnut*

*CRAFTSMAN — Black*

*CRAFTSMAN — Warm Chestnut*

## LINERS
(Choose One)

PORCELAIN

*Black Reflective*

CERAMIC FIBER

*Black Tie Stacked*

*Black Tie Herringbone*

*Heritage Brown Stacked*

*Heritage Brown Herringbone*

MULTI-FUNCTION TOUCH REMOTE (Included)

## APPLIANCE SPECIFICATIONS




| | GEMINI DLX 35 | GEMINI DLX 40 | GEMINI DLX 45 |
|---|---|---|---|
| A | 32-1/8" | 37-1/8" | 37-1/8" |
| B | 30-1/2" | 35-1/2" | 35-1/2" |
| C* | 19-1/2" | 24-1/2" | 24-1/2" |
| D* | 29-1/4" | 34-1/4" | 39-1/4" |
| E | 35-1/4" | 40-1/4" | 45-1/4" |
| F | 25" | 30" | 35" |
| G | 12-1/2" | 15" | 17-1/2" |
| H | 32-7/8" | 37-7/8" | 42-7/8" |
| I | 6-7/8" | 6-7/8" | 6-7/8" |
| J | 17" | 17" | 17" |
| K | 10-1/8" | 10-1/8" | 10-1/8" |

*C & D are glass viewing area dimensions

*FRONT COVER* *Gemini DLX 40 with Black Tie Herringbone Liner and Craftsman Warm Chestnut Facade*

## FLAT WALL FRAMING SPECIFICATIONS

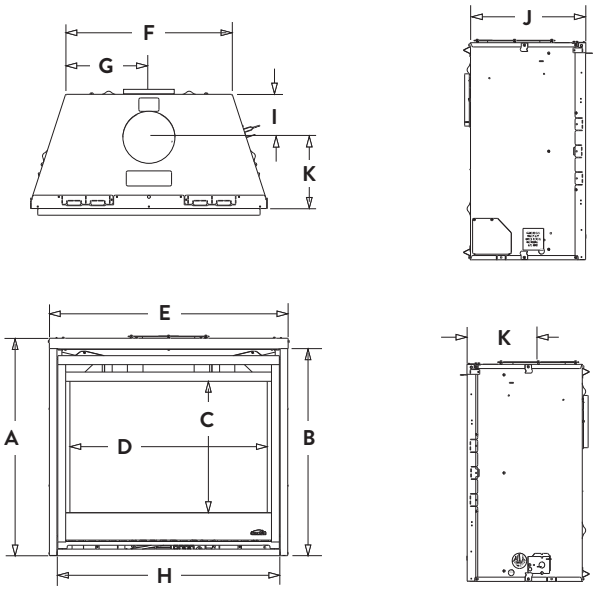


| | GEMINI DLX 35 | GEMINI DLX 40 | GEMINI DLX 45 |
|---|---|---|---|
| L | 35-7/8" | 40-7/8" | 45-7/8" |
| M | 36-1/4"* | 41-1/4"* | 41-1/4"* |
| N | 38-3/4" | 43-3/4" | 43-3/4" |
| O | 18-1/2" | 18-1/2" | 18-1/2" |
| P | 23-3/8" | 28-1/4" | 28-1/4" |

* Includes 4" for fold-up standoffs

## FIREPLACE EFFICIENCIES – Listed to ANSI Z21.88 as a gas fireplace heater.

| MODEL | FUEL | BTU/HR | AFUE** | P4 / ENERGUIDE* |
|---|---|---|---|---|
| GEMINI DLX 35 | NG | 26,000-15,000 | 71.0% | 67.0% |
| GEMINI DLX 35 | LP | 23,000-17,000 | 66.0% | 66.0% |
| GEMINI DLX 40 | NG | 32,000-17,000 | 72.0% | 63.0 % |
| GEMINI DLX 40 | LP | 26,000-19,000 | 69.0% | 62.5% |
| GEMINI DLX 45 | NG | 35,000-23,000 | 70.0% | 62.40% |
| GEMINI DLX 45 | LP | 28,000-20,000 | 67.0% | 57.0% |

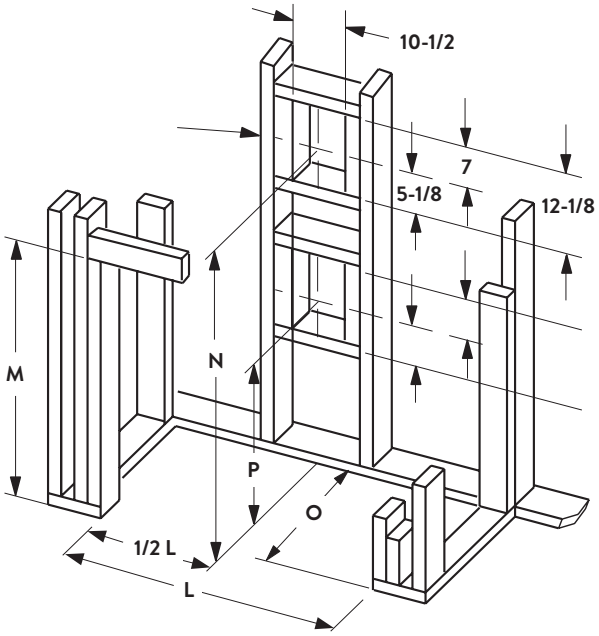*Intermittent ignition systems.

**Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

IMPORTANT NOTES:
As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

astria FIREPLACES®

© 2018 Innovative Hearth Products

Visit us online
Astria.us.com

PFS C US Report #F13-094

NFI

Canada ENERGUIDE
Look for the EnerGuide Gas Fireplace Energy Efficiency Rating in the brochure
Based on CSA P.4.1-2015